



Replacement Hotplate Installation Guide

The hotplate can be installed in either the top or rear flue outlet - the steps to install are the same. Do not install into a stove whilst it is hot or in use. Observe safe working practices whilst installing or adjusting. Please consult the stoves original Installation Guide for further information and guidelines.

Parts Included




Required



8mm
Spanner Fire
Cement


Step 1

Remove the throat plate to allow access to the flue outlet.

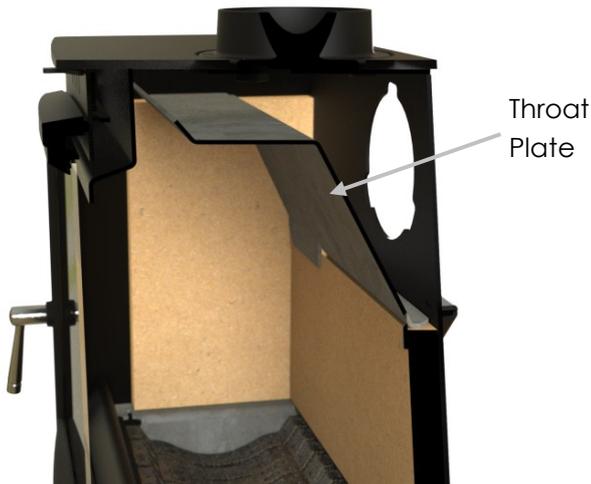

Step 2

Apply fire cement around the inside edge of the hot plate. Fire rope can also be used to create a seal.

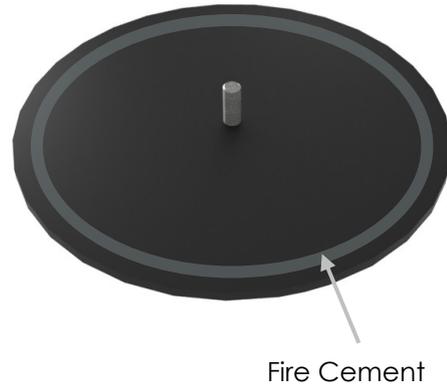

Step 3

Place the circular piece of the hot plate against the flue outlet from the exterior of the stove with the thread pointing inwards.



Step 4

Put the triangular piece onto the thread from the inside, followed by the nut and tighten firmly. Clean away any surplus fire cement.

